

2000 Series

Compact Utility Tractors 2320 / 2520 / 2720



STANDARD FEATURES AND OPTIONS




Twin Touch™ transmission pedals make it easy to switch from forward to reverse, and let you rest your heel on the platform the whole time you drive.

Standard, easy-to-use cruise control lets you concentrate on the task at hand.

OTHER OPTIONS

- Canopy
- Forward work lights
- Front weights
- Hood guard
- Independent hydraulic mower lift
- Mechanical hydraulic diverter
- Power beyond hydraulics
- Rear wheel weights
- Rear work light
- Umbrella
- Warning light guards
- 3rd SCV rear hydraulic kit

Dimensions

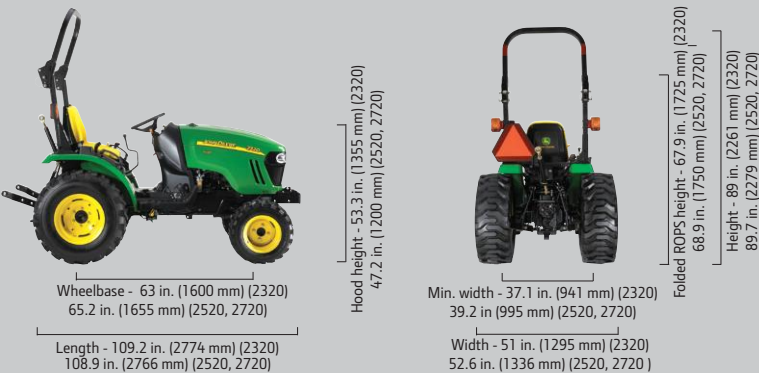

- 1 Optional Independent Lift Kit uses tractor hydraulics to raise and lower deck, independent of the 3-point hitch position.
- 2 Folding ROPS are standard and comply with ASAE and OSHA standards.
- 3 Hydrostatic power steering for smooth and steady maneuvering.
- 4 On Ramp Drive Over Deck allows for easy attaching of mower deck.
- 5 200 CX loader can attach and detach in under 3 minutes – with no tools.
- 6 Convenient loader joystick is positioned close at hand and clear of your knee.



2000 TWENTY SERIES

The top performers
always make it
look easy.

Effortless and natural. That's what it feels like to get behind the wheel of our premium 2000 TWENTY SERIES Tractors. These compacts have the comfort and convenience features other tractors in their category salivate over: standard cruise control, Drive Over Deck, power steering, and an optional independent lift kit. Throw in durable "big-tractor" features like a full Category 1 three-point hitch and heavy-duty axles for higher loads and you have three compacts who act like heavyweight contenders. If you're looking for a tractor that's compact but operates on another level, look at the 2320, 2520, and 2720. Or build one online at www.JohnDeere.com/2000



OVER 50 ATTACHMENTS



1 To quickly change implements with the iMatch Quick-Hitch, you simply back in, hydraulically lift the unit and secure the latches.

2 Once you're connected and the unit is in place, there's an even easier way to automatically hook up PTO-driven attachments. The iMatch Auto-Hitch is the answer. To hook up the drive shaft to the secure unit, just rotate the handle, turn and pull AutoHitch lever.

3 Drive off.

Pick up and go.

More than 50 attachments are ready and waiting for you to give them a spin. From backhoes to wheel rakes and every task in between, John Deere commercial-grade attachments not only do it all, they do it better and sooner. The time between starting up your tractor and getting work done is considerably shorter, thanks to John Deere iMatch™ AutoHitch™, Quick Park loaders and drive-over OnRamp™ decks.



iMatch™ Auto Hitch™

Stay in your seat. This exclusive, patent-pending coupling system allows you to effortlessly attach rear-mounted, PTO-driven implements without getting out of the seat. Use your imagination. Mowing, rotary cutting, blading and grading, tilling or aerating—you won't find a simpler way to get more done.



Attachments

	2320	2520	2720
AERATOR		•	•
BACKHOES	•	•	•
BLADES	•	•	•
BOX BLADES	•	•	•
BROADCAST SPREADERS	•	•	•
DISK HARROW	•	•	•
LANDSCAPE RAKES	•	•	•
LOADERS	•	•	•
MANURE SPREADERS	•	•	•
MATERIAL COLLECTION SYSTEMS	•	•	•
MID MOUNT MOWERS	•	•	•
POSTHOLE DIGGERS BY ROTOMEC	•	•	•
PULVERIZERS	•	•	•
ROTARY BROOMS	•	•	•
RAKES	•	•	•
ROTARY CUTTERS	•	•	•
ROTARY TILLERS	•	•	•
SNOW BLOWERS	•	•	•
TEDDERS	•	•	•

1

Quick Park™ Loaders – Fast cycle times and impressive lift capacity for superior loading performance. Save time loading and save time putting them on and taking them off—a mere three minutes or less.

2

Rotary Cutters – Designed to cut wide areas fast and those hard-to-reach areas easier.

3

Mid Mower-Loader Mechanical Diverter – No more switching hoses back and forth, this kit provides another set of couplers at the mid SCV. The operator simply moves a lever and diverts the hydraulic fluid to the implement that they choose to use. A real convenience when switching from mower to loader work.

4

Front Blades – From moving dirt & gravel, to clearing snow, these versatile front blades can angle right or left to make your job easier.

5

Tiller – Commercial-duty with heavy-duty tubular tine shafts for excellent performance and durability even in packed down soil conditions.

6

Backhoes – Powerful double-acting cylinder swing system provides a 180-degree swing, precise control and extra torque when backfilling. Boom cylinders are mounted on top for superior visibility to the trench. Powerful digging force makes quick work in tough conditions.



No one builds or backs tractors better than John Deere.

It's the fine print, but a big story:
Every John Deere Compact Tractor comes with a 3-year/2000-hour limited warranty.*
See your dealer for details.

3 YEARS 2000 HOURS
LIMITED WARRANTY

Total support is standard equipment.

No one can duplicate the support and knowledge of your local John Deere dealer. From the moment you enter a John Deere dealership, you can be sure you're getting the very best in customer assistance.

Exceptional Parts Support: Behind every John Deere is a parts support network to get you the high-quality part you need fast. If your dealer does not have a part in stock, in most cases you can order it by 5 p.m., and have it the next day. Or, order parts online at www.JDParts.JohnDeere.com.

Flexible Available Financing: John Deere Financial has convenient and flexible financing options designed for you. See your dealer for details.

* Hour and/or usage limitations apply and vary by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE COMMERCIAL AND CONSUMER EQUIPMENT at dealer for details.

2320

2520

2720

ENGINE			
Type	Yanmar 3TNV76	Yanmar 3TNV82A	Yanmar 3TNV88
HP	24.1 (17.7 kW) †	26.4 (19.4 kW) †	31.4 (23.1 kW) ‡
PTO HP	18.0 (13.4 kW)	20.5 (15.3 kW)	23.5 (17.5 kW)
Rated Speed, RPM	3,000	2,600	2,500
Engine displacement	68 cu. in. (1.115 L)	81.2 cu. in. (1.33 L)	97.62 cu. in. (1.6 L)
Battery power	12V, 500 CCA	12V, 500 CCA	12V, 500 CCA
Alternator	20 A	40 A	40 A

HYDRAULICS			
Steering	2.2 gpm (8.5 L/min)	5.5 gpm (20.8 L/min)	5.5 gpm (20.8 L/min)
Implement	3.4 gpm (12.7 L/min)	5.0 gpm (18.8 L/min)	5.0 gpm (18.8 L/min)
Total capacity	5.6 gpm (21.2 L/min)	10.5 gpm (39.6 L/min)	10.5 gpm (39.6 L/min)
Lift capacity (24 in. behind center link)	1,150 lb. (522 kg)	1,250 lb. (567 kg)	1,250 lb. (567 kg)

TRANSMISSION			
Standard	Hydrostatic - 2 Range	Hydrostatic - 2 Range	Hydrostatic - 2 Range
Optional	NA	NA	NA
Final drive	Spur Gear	Spur Gear	Spur Gear
Brakes	Wet disk	Wet disk	Wet disk
Steering	Power	Power	Power

PTO			
PTO type	Independent	Independent	Independent
PTO options	Mid and Rear standard	Mid and Rear standard	Mid and Rear standard

REAR HITCH			
Type	Category 1	Category 1	Category 1
Control type	Position	Position	Position

WEIGHT			
With all fluids	1,660 lb. (753 kg)	1,865 lb. (846 kg)	1,973 lb. (895 kg)

LOADER			
200X / 200CX Lift capacity at full height (pivot point)**	1023 lb. (465 kg)	1027 lb. (467 kg)	1027 lb. (467 kg)

‡ Manufacturer's estimate of power (ISO) per 97/68/EC.

** For a complete list of loader specifications see your dealer.

† The engine horsepower information is provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower will be less.



This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color scheme, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company.