


Technical data sheet – Starscreen 2-ma17

Starscreen 2 fractions, version mobile

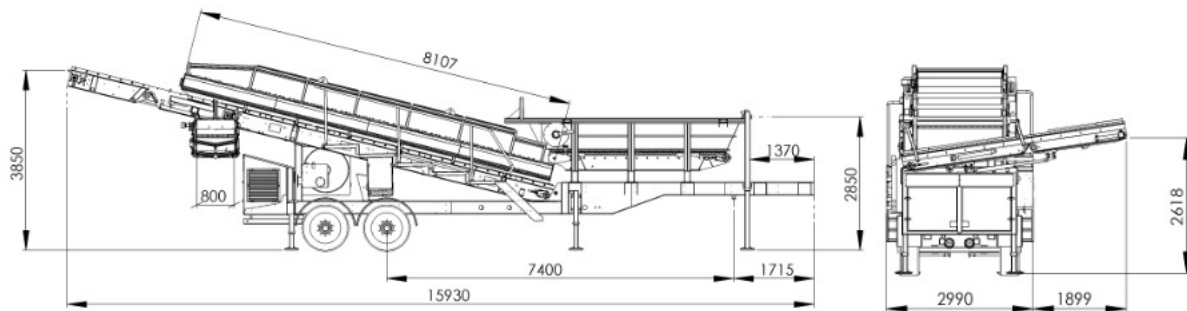

Copyright by ISO 160161

General

Throughput capacity:	max. up to 200 m ³ per hour
Weight:	approx. 25 t (depends on equipment)
Construction form:	Alternatively as trailer or pulling bar machine according to Road Traffic Licensing Regulation
Acceptances:	CE declaration / vehicle registration according to German road regulation (*)

Hopper

Material to be conveyed:	All forms of bulk material, compost, earth, rubbish etc. We recommend in cases of foreign pieces like stones, iron bigger than 400 mm a prior use of bar grid / vibration grid
Capacity volume:	7.00 m ³
Hopper dimensions:	1.50 m x 3.90 m below 1.80 m x 4.20 m above
Loading height:	3.00 m (incl. Grid 3.35m)
Drive:	Spur gears / Danfoss OM
Conveying speed:	Infinitely adjustable, automatic switch on / off in the event of overload.
Auger:	Optional infinitely adjustable to achieve optimum charging of the material. Use in compost, bark, etc.
Belt width:	1.50 m
Profiling:	Profiled belt with smooth surface

Starscreen:

Starscreen fractions:	8 mm – 80 mm depends on customer request
Starscreen dimensions:	1.70 m x 8.10 m
Drive:	Danfoss OMS, high-quality roller chain with hardened, galvanized double sprockets
Bearing:	High quality flange bearings; bearing size depends on screening size. To get a longer life the bearings are provided with dots of central lubrication.
Chain protection:	folding sidewise

Fine conveyor belt

(Right hand side)	
Dimensions:	0.65 / 0.80 m x 4.60 m
Conveying speed:	Infinitely adjustable
Profiling:	Smooth
Drive:	Danfoss OM



Backers Maschinenbau GmbH
Tel. +49 (0)59 36 / 93 67-0
www.backers.de

Technical data sheet – Starscreen 2-ma17

Starscreen 2 fractions, version mobile

Over fraction belt (*)

(backward)

Dimensions:	1.60 m x 3.60 m
Conveying speed:	Infinitely adjustable
Profiling:	Smooth
Drive:	Danfoss OM

Motor specification

Manufacturer:	Perkins / 1106D - E66TA
Type:	1106
Output:	130 kW gross / 122 kW net
Emission standard:	Certified as latest standard
Cooling:	Water cooled
Diesel tank:	380 litres

Electrical control

Presentation:	Graphical CAN-BUS colour display 6.5 “
Function:	With integrated CAN-BUS piloting system
Operator switching cabinet:	0.50 m x 0.50 m x 0.21 m
Operation:	Via manual operation / if preferred, radio remote control (*)
Description:	simple use by automatic start-stop program

Hydraulics

Pumps:	Bosch – Rexroth A10V0 Tandem
Valves:	Danfoss PVG 32
Cooling:	Hydraulic air cooling
Filter:	pressure- and return flow filter
Hydraulic tank:	250 litres
Description:	Safety device through level switching off in case of losing hydraulic oil

Running gear

Tyres:	315 / 60 R22.5
Brakes:	Wabco 2SM / 2M with ABS sensitised
Axles:	Tandem axle FAD / Trennkamp Gehle max. 8 t per axle
Suspension:	Gigant 160 / 80-1270PW

Varnish:

Priming:	Eposist varnish
Final varnish:	PU – finish varnish
Colouring:	daffodil yellow (RAL 1007) (**), black (RAL 9005) and galvanized parts

*(optional ordering possibility)

** (optional in other colours available)



Backers Maschinenbau GmbH
Tel. +49 (0)59 36 / 93 67-0
www.backers.de