



LIFT-A-LOFT

AMV36 SERIES

AMV36 SERIES


DRIVE, LIFT, ROTATE, AND REACH AT UP TO 29 FEET (8.83 METERS) WORKING HEIGHT

MODEL AMV36-19

- 36 Inches (0.91m) Wide
- Working Height to 25'3" (7.69m)

MODEL AMV36-23

- 36 Inches (0.91m) Wide
- Working Height to 29'3" (8.91m)

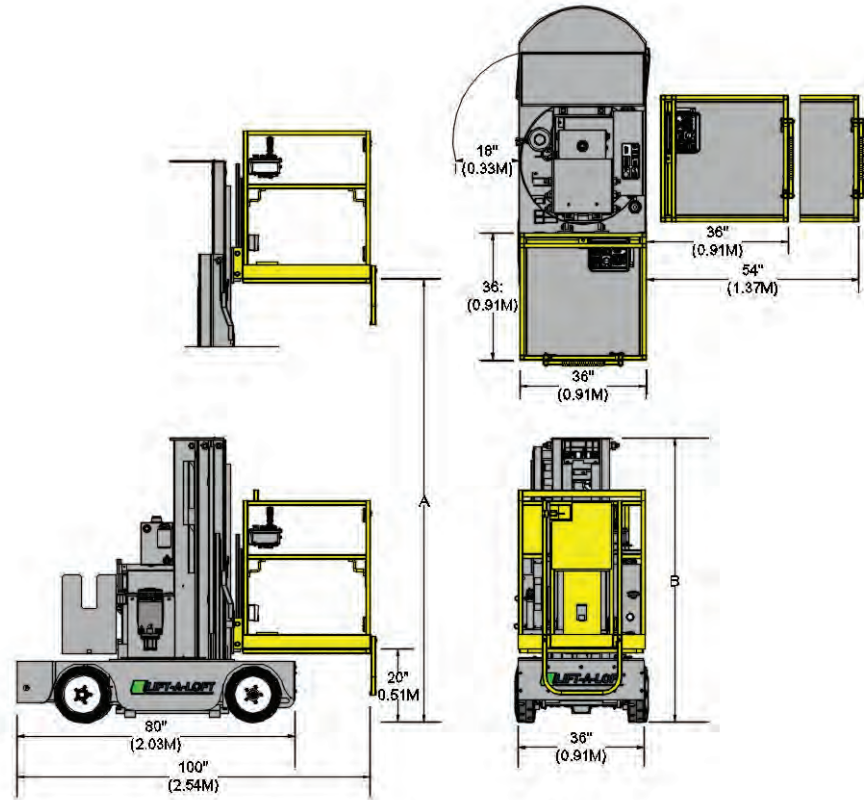

MODEL NO.	A-MAX PLATFORM HEIGHT	B-TRAVEL HEIGHT	GROSS WEIGHT W/BATTERY
AMV36-19	19' 3" (5.86m)	6' 10" (2.08m)	6,000 lbs (2721.6 kg)
AMV36-23	23' 3" (7.08m)	7' 11" (2.41m)	6,640 lbs (3,011.8 kg)

PERFORMANCE (AVERAGE)

- Travel Speed (Variable & Controllable)
 - High Speed – 2.27 mph (3.65km/hr)
 - High Torque – 1.14 mph (1.83km/hr)
- Elevated – 0.68 mph (1.13km/hr)
- Gradeability – 25%
- Turning Radius Inside – 51" (1.30m)
- Outside – 102" (2.59m)
- Platform Lift Speed – 0.42 ft/sec (0.13 m/sec)
- Platform Lower Speed – 0.63 ft/sec (0.19 m/sec)
- Platform Rotation – 1 RPM
- Platform Capacity 500 lbs (226.8kg)
- Brakes Spring Applied, Pressure Released

OPTIONS

- 18" (0.46m) Roll Out Platform Extension (Extenda-Deck)
- Motion Alarm
- Flashing or Rotating Light

BATTERY INFORMATION

- Four 6-volt Deep Cycle HD245 AHC Batteries with Fully Automatic On-Board Charger (110VAC Power Input)
- or
- 24-Volt Industrial Battery/Industrial Charger
- Compartment Size 32"L (0.81m) X 14"W (0.36m) X 31"H (0.79m)