


**TAMPER**  
**BT 60, BT 65, BVT 65**

**PERFORMANCE DATA**

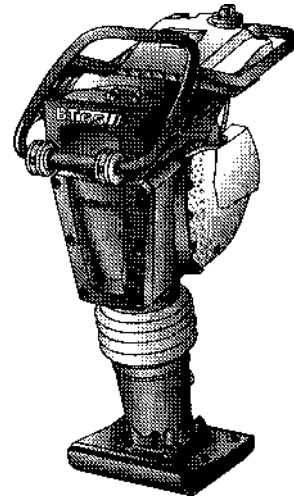

Machine type	Compaction output (m <sup>3</sup> /h)		
	Gravel, sand	Mixed soil	Silt, clay
BT 60	9-13	7-11	6-9
BT 65	13-17	8-12	7-10
BVT 65	13-17	8-12	7-10

# Technical Data

## Shipping dimensions in m3

<b>BT 60</b>	0,262
<b>BT 65</b>	0,262
<b>BVT 65</b>	0,262


## Standard Equipment

- Engine Protection System
  - Protective engine covering
  - Two-stage double air filter system (BT)

- Automatic oil level control
- Dual fuel filter system
- Vibration insulated steering bow
- Self-cleaning air filter housing
- Protective covering
- Single point lifting device
- Recoil starter
- Carrying handles
- Plastic castor as loading aid
- Infinitely variable frequency
- Combination of engine stop/fuel switch
- h-/ rpm meter (BT)
- 3-2-1 Warranty

## Optional Equipment

- Transport device with puncture proof wheels
- Tamper foot widths (160-330mm)
- Tamper foot extensions
- h-/ rpm meter (BVT)
- Special painting
- Tool kit
- Service Kit



## Dimensions in mm

	B	H	L	L1	W
<b>BT 60</b>	350	1030	728	335	230
<b>BT 65</b>	350	1030	728	335	280
<b>BVT 65</b>	350	1030	728	335	280

## Technical Data

	BOMAG BT 60	BOMAG BT 65	BOMAG BVT 65
<b>Weights</b>			
Operating weight CECE .....kg	58	68	67
Basic weight .....kg	57	67	66
<b>Dimensions</b>			
Working width (tamper plate) .....mm	230	280	280
<b>Driving Characteristics</b>			
Working speed max. ....m/min	20	20	20
Area coverage max. ....m <sup>2</sup> /h	276	336	336
<b>Drive</b>			
Engine manufacturer .....	Honda	Honda	Honda
Type .....	GXR 120	GXR 120	GX 100
Emission stage .....	CARB Phase III	CARB Phase III	CARB Phase III
Cooling .....	air	air	air
Number of cylinders .....	1	1	1
Performance SAE J 1349 .....kW	2,8	2,8	2,3
Fuel .....	gasoline	gasoline	gasoline
Drive system .....	mech.	mech.	mech.
Fuel consump. aver. during operation ....l/h	0,9	0,9	0,9
<b>Exciter system</b>			
Frequency .....Hz	10- 11,8	10- 11,8	10- 11,8
Impact force .....kN	15,0	17,0	16,0
<b>Capacities</b>			
Fuel .....l	3,0	3,0	3,0

Technical modifications reserved. Machines may be shown with options.

