

**SPECIFICATIONS**

No. of cylinders / valves	4L / 4	
Aspiration	WG	
Injection System	COMMON RAIL 1600 bar	
Displacement	liters	4.5
Bore per Stroke	millimeters	104 x 132
Rated power	kW (HP) @ rpm	125 (170) @ 2200
Peak torque	Nm (kgm) @ rpm	712 (-) @ -
ATS	HI-eSCR	
Certification	Stage IV / Tier 4 Final	

**WEIGHT AND DIMENSIONS**


Dimensions (L x W x H)	mm	816 x 687 x 1049
Dry Weight	Kg	402

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

**POWER & TORQUE**

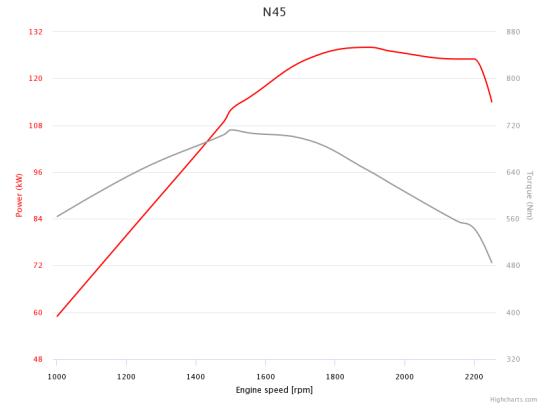

**CONSTRUCTION**

Do you want to know more?



LEGEND

**Air Handling**

- TC (Turbocharged)
- NA (Naturally Aspirated)
- TCA (Turbocharged with aftercooler)

**Turbocharger**

- WG (Wastegate)
- VGT (Variable Geometry Turbocharger)
- TST (Twin Stage Turbocharge)

**Exhaust System**

- EGR (Exhaust Gas Recirculation)
- SCR (Selective Catalytic Reduction)
- DPF (Diesel Particulate Filter)
- DOC (Diesel Oxidation Catalyst)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE [WWW.FPTINDUSTRIAL.COM](http://WWW.FPTINDUSTRIAL.COM)

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

