

SPECIFICATIONS

No. of cylinders / valves	4L / 4		
Injection System	ECR		
Aspiration	e-VGT		
Displacement	liters	3	
Bore per Stroke	millimeters	96 x 104	
Max power	kW (HP) @ rpm	129 (175) @ 3500	
Max torque	Nm (kgm) @ rpm	430 (-) @ 1600	
ATS	DOC - SCRoF - SCR - CUC		
Certification	Euro VI E		

WEIGHT AND DIMENSIONS


Dimensions (L x W x H)	mm	858 x 704 x 739	
Dry Weight	Kg	257	

DIMENSIONS CAN BE CHANGED ACCORDING TO ENGINE OPTIONS



IMAGES SHOWN ARE FOR ILLUSTRATION PURPOSE ONLY

POWER & TORQUE

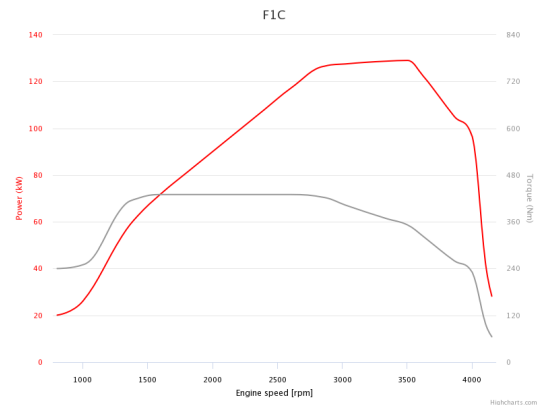

LIGHT COMMERCIAL VEHICLES

Do you want to know more?



LEGEND

Turbocharger

e-VGT (Electronic Variable Geometry Turbo)

2stT (Twin-Stage Turbo)

WG (Fixed Geometry Turbocharger with Waste Gate valve)

Injection System

EUI (Electronically Controlled Unit Injector)

MPI (Multi-Points Injection)

ECR (Electronic Common Rail)

Exhaust System

ATS (Aftertreatment System)

CCDPF (Cross Coupled Diesel Particulate Filter)

CUC (Clean Up Catalyst)

DOC (Diesel Oxidation Catalyst)

SCR (Selective Catalytic Reduction)

p-DPF (Diesel Particulate Filter w/ passive regeneration)

EGR (External Exhaust Gas Recirculation)

HPEGR (High Pressure Cooled External EGR)

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE FPT INDUSTRIAL SALES NETWORK OR VISIT OUR SITE WWW.FPTINDUSTRIAL.COM

SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

