


XT Mobile Shear (GXT)

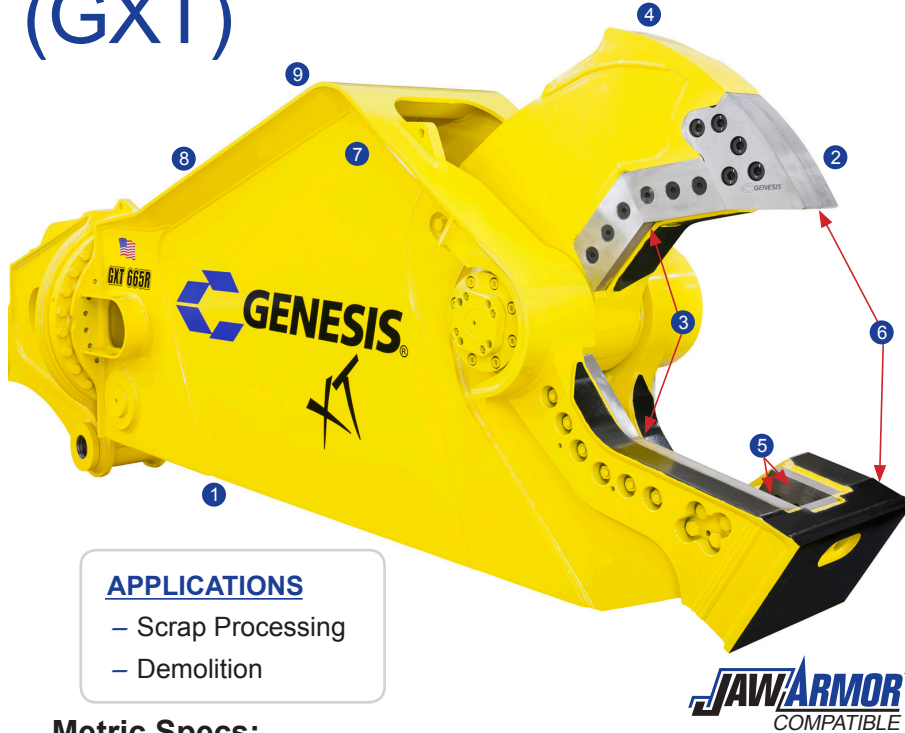

APPLICATIONS

- Scrap Processing
- Demolition

FEATURES

- 1 All the power in a shorter, lighter shear with a center of gravity closer to the excavator. Most models mount on smaller size carriers for lower initial investment and hourly operating costs.
- 2 Bolt-on piercing tip encapsulates front of upper jaw, minimizing risk of damage while reducing welding build-up and downtime
- 3 Short primary cutting blades position apex closer to the rear of the jaws and draw material further into the jaws where higher force makes efficient cuts
- 4 Weld-on, replaceable, highly abrasion-resistant steel rhino horn protects front of upper jaw, reducing downtime and welding build-up
- 5 Dual guide blade length matches piercing tip length enabling blades to be shimmed independently to accommodate piercing tip wear
- 6 Improved jaw geometry makes it easier to pick up material and reduces wear from ground contact
- 7 Reverse-mounted hydraulic cylinder shortens shear length and weight while protecting rod from damage
- 8 Remote-mounted hydraulic speed valve improves serviceability and minimizes stress on other critical hydraulic components
- 9 Lower shear height improves visibility while providing superior rigidity and structural integrity

Metric Specs:

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Min. Excavator Wt. Boom Mount*** (mt)	Min. Excavator Wt. Stick Mount*** (mt)
	(kg)	(mm)	(mm)	(mm)		
GXT 115****	1,406	406	457	1,524	7	11
GXT 115R****	1,610	406	457	2,337	8	14
GXT 225	1,905	457	508	1,727	11	16
GXT 225R	2,223	457	508	2,413	14	20
GXT 335	2,948	584	660	1,956	12	20
GXT 335R	3,311	584	660	2,718	17	30
GXT 445	4,309	711	711	2,184	18	34
GXT 445R	4,990	711	711	3,073	22	41
GXT 555	5,262	762	762	2,438	23	41
GXT 555R	5,942	762	762	3,353	25	50
GXT 665	5,987	813	813	2,743	25	50
GXT 665R	6,668	813	813	3,658	31	54
GXT 775	7,031	889	940	2,946	31	61
GXT 775R	8,051	889	940	3,962	36	68
GXT 995	8,165	991	1,067	3,251	36	77
GXT 995R	9,072	991	1,067	4,318	45	82
GXT 1555	10,433	1,118	1,168	4,089	50	86
GXT 1555R	12,134	1,118	1,168	5,232	66	113
GXT 2055	14,515	1,219	1,270	4,394	66	Contact Factory
GXT 2055R	16,420	1,219	1,270	5,359	81	Contact Factory
GXT 2555	22,906	1,372	1,422	4,699	Contact Factory	Contact Factory
GXT 2555R	25,628	1,372	1,422	6,528	Contact Factory	Contact Factory

*Weight includes mounting bracket to attach to excavator. **Distance is measured from the attachment mounting pivot (boom or stick) forward.
 ***2nd-member installations that are at or near minimum excavator weight and all 3rd-member installations require pre-approval from Genesis.
 ****The GXT 115 and GXT 115R have a single guide blade. GXT shears are covered by a 12-month, 1,500-hour (whichever occurs first) warranty.
 Genesis reserves the right to continually make product improvements designed to positively enhance performance.
 Patents: genesisattachments.com/patents