

**P270TJTK** *Tracked*

**PALFINGER**


LIFETIME EXCELLENCE

**MAXIMUM MOBILITY IN MINIMUM  
WORKING SPACE. TRACKED PLATFORM  
WITH MAXIMUM AERIAL PERFORMANCE.**







# P270TJTK *Tracked*

## WORKING DIAGRAMS

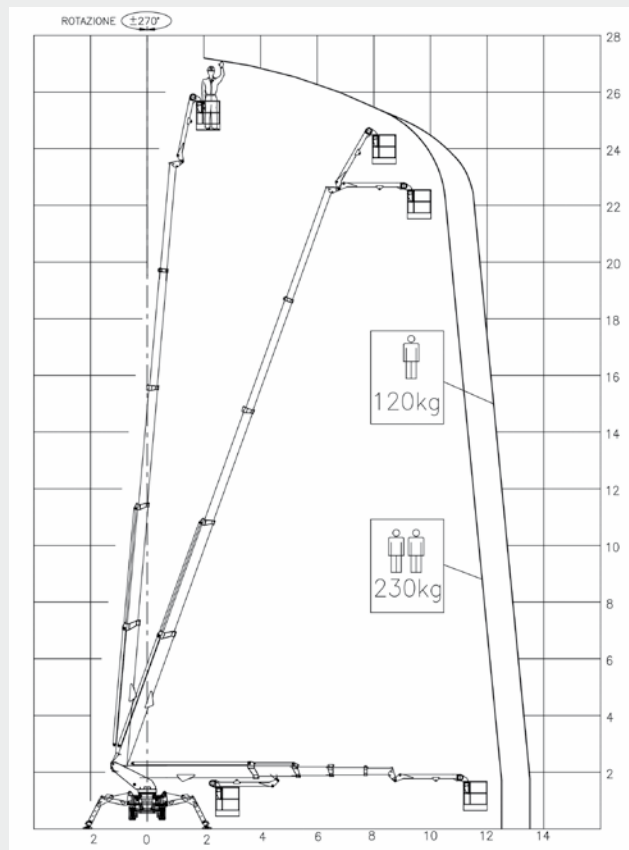

## DIMENSIONS

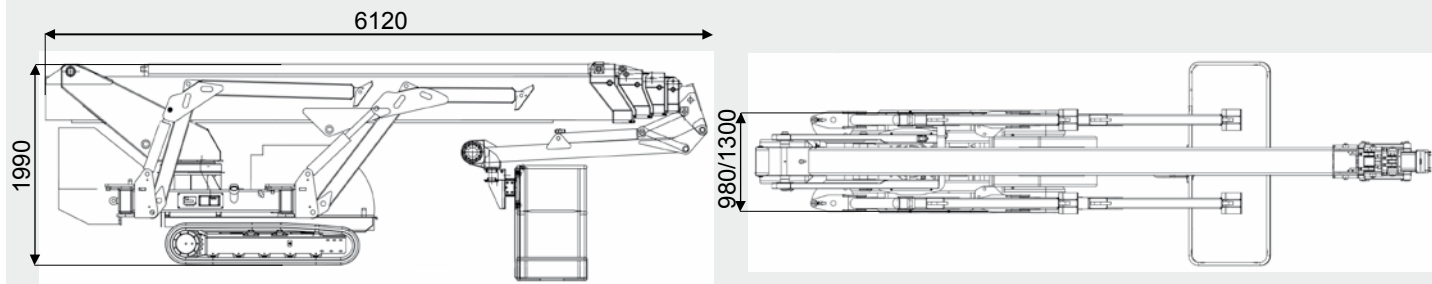

230 kg	120 kg	120/230 kg	L1	L2	W1	W2	W3
12500 mm	13500 mm	7000 mm	5091 mm	6469 mm	4538 mm	3661 mm	2744 mm

- Ultra compact design and maximum rigidity
- Structurally sound
- Fits through narrow passageways
- Minimal stabilisation footprint
- Great height versatility
- Easy to use
- Safety at work

*Tracked*

## TECHNICAL SPECIFICATIONS

Maximum working height	27 m
Maximum lateral outreach	13,5 m
Maximum platform load-bearing capacity	230 kg
Operating angle of working arm	175°
Column rotation	540°
Basket dimensions	180 x 70 x 110 cm
Basket rotation	90° + 80°
Engine featured as standard	Diesel
Maximum stabilisation gradient	26%
Maximum travel gradient	40%
Height during travel	1990 mm
Width during travel	980/1300 mm
Length during travel	6120 mm
Gross vehicle weight	4580 kg

## OPTIONAL

Anti-collision device for basket
One-man basket
Electrical power generator, 3kw, 230 v ac
Hands-free intercom system
Air/water line
Non-marking track belts
Extra plates
Electric or hydraulic winch



# LIFETIME EXCELLENCE

THE RESULT IS **PALFINGER ACCESS PLATFORMS** FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. **DEVELOPED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.**

BETTER  
SOLUTIONS

BETTER  
EFFICIENCY

BETTER  
ERGONOMICS

HIGHER VALUE  
RETENTION



HIGHER  
AVAILABILITY

HIGHER  
SERVICEABILITY

BETTER  
ECOLOGY

MORE  
RELIABILITY

For further information please visit: [www.palfinger.com/thebrand](http://www.palfinger.com/thebrand)