

XTENSO 3

# **TELESCOPIC AERIAL PLATFORM XTENSO 3**

**CHASSIS VERSION** 



**Aerial platform** 

♣ 18,50 m \_\_\_







## **XTENSO 3 TELESCOPIC AERIAL PLATFORM**

Chassis version

// Working height: 18,50m

// Full outreach with 280kg in the basket: 13.90m

// Telescopic jib: 180°

// Rotation: 420°

// Basket capacity: until 280kg

| Full proportional controls

#### / STANDARD

- Engine start & stop from basket
- Hour-counter
- Stabilization with independent controls in the basket and from the ground
- Proportional controls on all movements (Possibility of several simultaneous movements)
- Automatic centering of the platform and the turret
- Hydraulic rotation of the basket in all positions
- Independant emergency manual pump
- Lifting arm consisting of a double telescope and a telescopic jib with 180° orientation
- Telescopic jib for an overhang of more than 5.10m and allowing 360° access to the ground

### / OPTION


- Signaling devices (triflash, 2 flashing lights, reflective strips)
- Fully opening insulating basket
- Aluminium side panels
- Ladder rack
- 220V electric / Water / Air socket in the basket
- Aluminium chests
- Cycle of use without outriggers
- Green Pack: the platform can be operated with the vehicule engine turned off

Full list of options, please contact us

## **/ TYPES OF RECOMMENDED VEHICLES:** FROM 14T (4X4 or 4X2):

- MAN TGL
- MAN TGM
- IVECO EUROCARGO
- RENAULT D
- MERCEDES ATEGO
- MERCEDES UNIMOG

For vehicles options, please contact us before order Installation on lower tonnages, please contact us

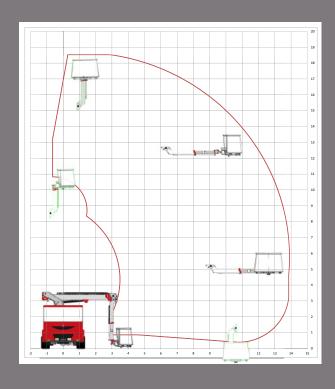





Scandlift AB Klangfärgsgatan 12 426 52 Västra Frölunda Sweden

Tel: +46.31.92.33.60 Website: www.scandlift.se info@scandlift.se





